



Features

- 4-ch SPDT Power Relay
- +3V to +30VDC Control Voltage
- 12V and 24V Version, Supply Voltage
- Status Indicator Leds
- Contacts Protection Suppressors
- DIN-Rail mounting ready

Introduction

Intelligent-Appliance IA-1007 Discrete Relay Module was designed for a simple conversion of digital output

into a dual pole 'Dry-Contact' output with a contact rating of 10Amp.

The IA-1007 Discrete Relay Module includes 4 SPDT Relays, Led status indicators and voltage suppressors across their contacts to eliminate EMI/RFI noise while being switched.

Control voltage operation range is +3 to 30VDC at a current of 1mA to 11mA.

Specifications

Relays

Channels 4

Type SPDT

Current Rating 10Amp @ 30VDC

10Amp @ 277VAC

Control Voltage 3-30 VDC Control Current 1-11 mA


General

Supply Voltage 12VDC or 24VDC

Power Consumption 1.5w

Size 114x56x50mm

Weight 105gr

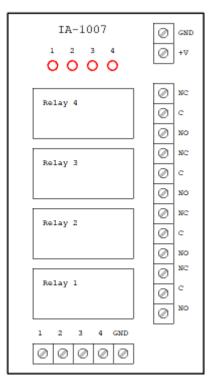

Ordering information

IA-1007-12/ IA-1007-24
4-ch Discrete Relay Module,
3-30V Control Voltage,
12 or 24VDC Supply Voltage
Version Depended