


AIMB-788

LGA1700 12th Generation Intel® Core™ i9/i7/i5/i3 ATX Motherboard with DP/HDMI/VGA, DDR4, USB 3.2, M.2

Preliminary

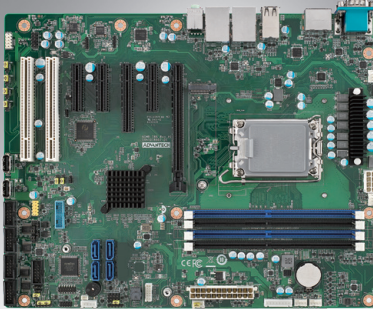

Features

- Intel® 12th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2(Gen2)
- Supports Intel vPro, AMT & TPM technologies
- Advantech iBMC remote out-of-band power management solution on DeviceOn

Note 1: TPM module is required to enable Intel vPro and TPM technologies.

Note 2: Legacy platform is not supported.


Quiet Specifications

CE FCC

	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700TE	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE	
Processor System	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz	
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB	
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2	
	TDP	65W	35W	65W	35W	65W	65W	35W	60W	35W	46W	35W	46W	35W	
	Socket	LGA 1700													
	Chipset	Q670E													
	BIOS	AMI 256MB SPI Flash													
Expansion Slot	PCI	2													
	PCIe x4 (Gen 3)	3													
	PCIe x8 (Gen 3)	1 (x4 link)													
	PCIe x16 (Gen 4) ^{note}	1													
Memory	Technology	Dual Channel (Non-ECC) DDR4 3200 GHz													
	Max Capacity	128 GB													
	Sockets	4 x 288-pin DIMM													
Graphics	Controller	Chipset integrated Intel HD Graphics													
	VRAM	Shares system memory is subjected to OS													
Ethernet	Interface	10/100/1000 Mbps													
	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT													
	Connector	2 x RJ-45													
SATA	Max. Data Transfer Rate	600 MB/s													
	Channel	4													
	RAID	0, 1, 5, 10													
Rear I/O	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)													
	HDMI	1 (Resolution up to 4096 x 2160 @ 60Hz)													
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)													
	Ethernet	2													
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)													
	Audio	2 (Line-out, Mic-in)													
	Serial	1 (RS-232)													
Watchdog Timer	Output	System reset													
	Interval	Programmable 1 ~ 255 sec													
Power Requirement	Power On	Intel Core XXXX , DDR4 32GB x 4													
	Voltage														
	Current														
Internal Connectors	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)													
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)													
	SATA	4													
	M.2	1 (PCIex4 M-key 2280 type)													
	GPIO	8-bit													
			Operating												
Environment	Temperature	0 ~ 60 °C (32 ~ 140 °F), depends on CPU loading and system thermal solution									Non-Operating				
	Humidity	95% @ 40 °C, non-condensing									-20 ~ 60 °C				
Physical Characteristics															
	Dimension (L x H)	304.8 x 244 mm (12" x 9.6")													

Note: The CPU PCIe slot can support graphic cards only due to Intel design specification. Other types of add-on cards will have no function installed on this slot.

Block Diagram

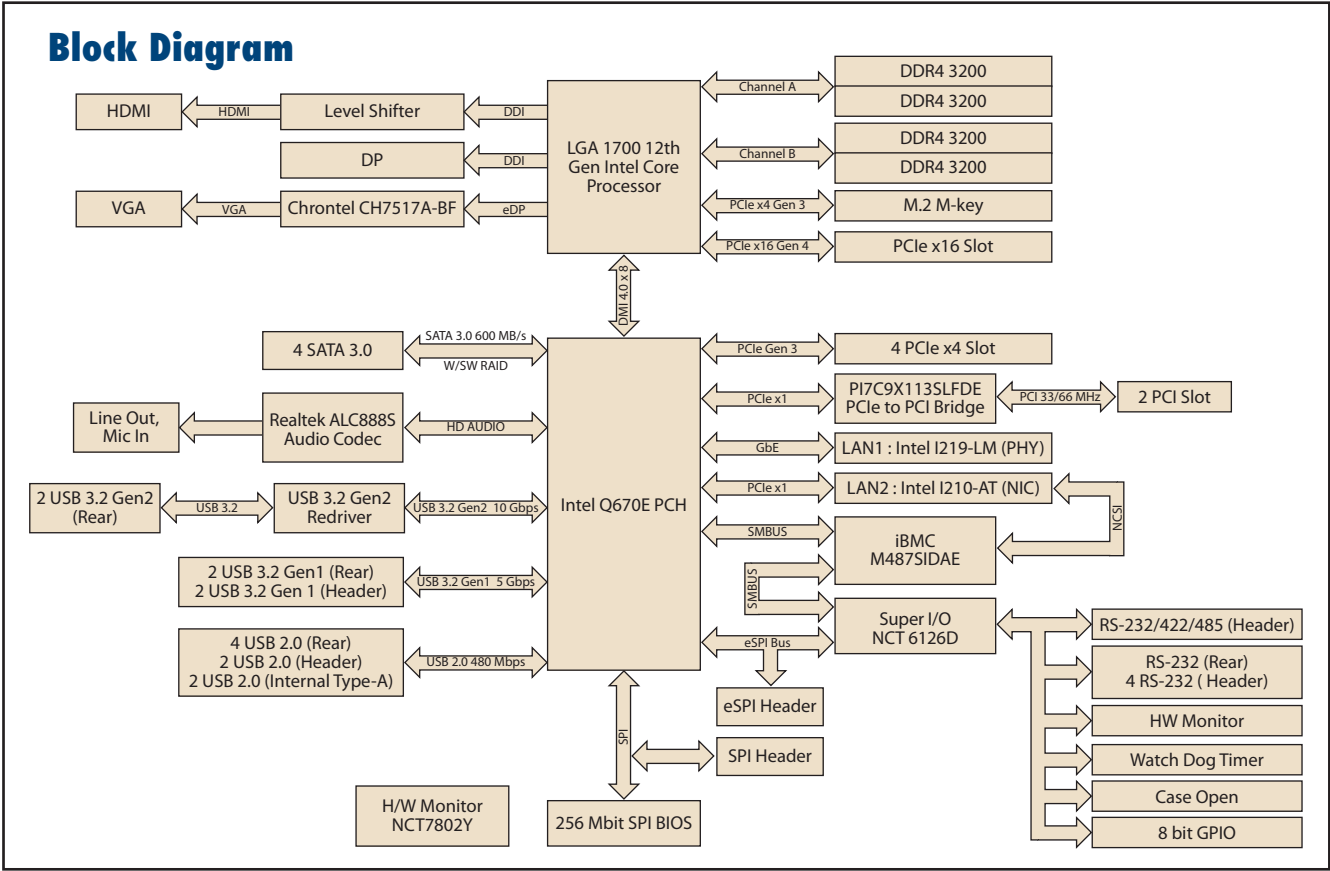

Ordering Information

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

Packing List

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

I/O View



AIMB-788G2-00A1

Optional Accessories

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU TDP=35-65W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	TPM2.0 SPI module to enable TPM and vPro technologies

Note: Purchasing AIMB-788's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible with AIMB-788.

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe16 & 1 PCIe1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe1 expansion

Note: AIMB-788 is not compatible with 1U chassis.